


# Safe-T-Span® Industrial Grating Details

## 51mm Deep T5020

# of Bars/ m of Width	Load Bar Depth	Open Area	Load Bar Centres	Approximate Weight
20	51 mm	50%	51 mm	10.3 kg/m <sup>2</sup>

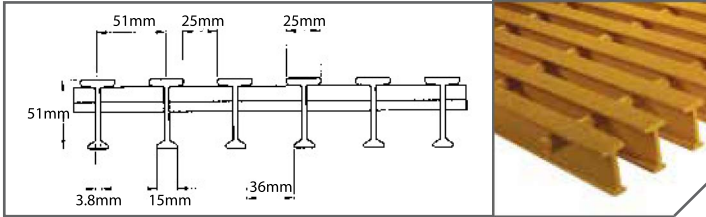


Section Properties per m of Width:  $A=6.8 \times 10^3 \text{ mm}^2$   $I=2.3 \times 10^6 \text{ mm}^4$   $S_t=1.1 \times 10^5 \text{ mm}^3$   $S_b=7.9 \times 10^4 \text{ mm}^3$   
Average EI = 71738 kN-mm<sup>2</sup> (SPAN ≥ 610mm)

## 51 mm Deep T3320 (ADA Compliant)



# of Bars/ m of Width	Load Bar Depth	Open Area	Load Bar Centres	Approximate Weight
26	51 mm	33%	38 mm	18.0 kg/m <sup>2</sup>

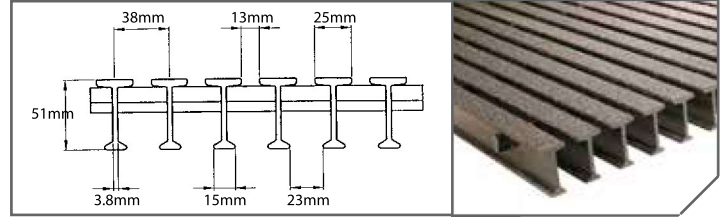


Section Properties per m of Width:  $A=9.1 \times 10^3 \text{ mm}^2$   $I=3.3 \times 10^6 \text{ mm}^4$   $S_t=1.4 \times 10^5 \text{ mm}^3$   $S_b=1.1 \times 10^5 \text{ mm}^3$   
Average EI = 93449 kN-mm<sup>2</sup> (SPAN ≥ 610mm)

## 25 mm Deep I4010 (ADA Compliant)



# of Bars/ m of Width	Load Bar Depth	Open Area	Load Bar Centres	Approximate Weight
39	25 mm	40%	25 mm	18.4 kg/m <sup>2</sup>

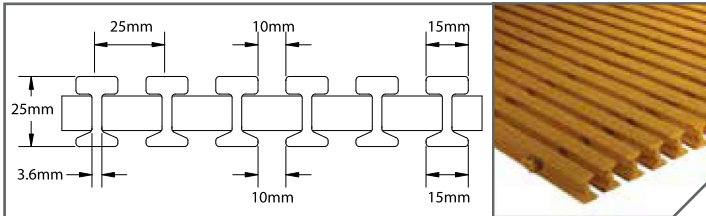


Section Properties per m of Width:  $A=8.4 \times 10^3 \text{ mm}^2$   $I=6.8 \times 10^5 \text{ mm}^4$   $S=5.1 \times 10^4 \text{ mm}^3$   
Average EI = 23442 kN-mm<sup>2</sup> (SPAN ≥ 610mm)

## 38 mm Deep I4015 (ADA Compliant)



# of Bars/ m of Width	Load Bar Depth	Open Area	Load Bar Centres	Approximate Weight
39	38 mm	40%	25 mm	22.5 kg/m <sup>2</sup>

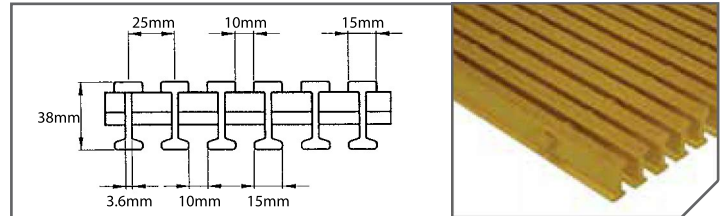

Section Properties per m of Width:  $A=1.0 \times 10^4 \text{ mm}^2$   $I=1.9 \times 10^6 \text{ mm}^4$   $S=9.7 \times 10^4 \text{ mm}^3$   
Average EI = 65036 kN-mm<sup>2</sup> (SPAN ≥ 610mm)

# Safe-T-Span® High Load Capacity Grating

High Load Capacity (HI) pultruded grating is yet another product in the arsenal of engineered glass reinforced plastic (GRP) solutions by Fibergrate. While capitalising on some of the traditional benefits of pultruded grating products - high strength, corrosion resistance, slip resistance, fire retardancy, non-conductivity, and low maintenance - this pultruded GRP product has been engineered to carry the forklift and tractor trailer loads that traditional pultruded GRP grating products are unable to support.

- 37%, 47%, and 58% open surface area
- Available in 25 mm, 38 mm, 51 mm, 64 mm, and 76 mm depths
- Rated for up to H20 loads in all five depths
- Flame spread rating of 25 or less (when tested in accordance with ASTM E-84), and a Class 1 Fire Rating
- HI37 Grating is ADA Compliant












- Standard panels consist of:
  - Fire-retardant vinyl ester resin system
  - Dark grey in color
  - Aluminum oxide grit top surface

Each HI grating is specially engineered to meet specific requirements. Contact the Fibergrate engineering team to determine which grating offers the best solution for your high load needs. (Applications with traffic perpendicular to trench or with turning wheel loads, contact Fibergrate engineering for design assistance.)

# High Load Capacity Grating Details

## Allowable Spans for Vehicular Loads

	Wheel Load (kg) (1/2 Axle Load + 30% Impact)	Load Distribution (mm)		Allowable Span <sup>2,3</sup> (mm)					Load Distribution (mm)		Allowable Span <sup>2,3</sup> (mm)											
		Parallel to Axle (1)	Perpendicular to Axle	HI3710	HI3715	HI3720	HI3725	HI3730	Parallel to Axle (1)	Perpendicular to Axle	HI4710	HI4715	HI4720	HI4725	HI4730	Parallel to Axle (1)	Perpendicular to Axle	HI5810	HI5815	HI5820	HI5825	HI5830
 <b>AASHTO H-25 Truck<sup>4</sup></b> 18 144 kg Axle Load Dual Wheels	11 793	635 + 51	635	431	609	736	889	1 066	635 + 60	635	406	584	711	838	1 016	635 + 76	635	381	558	685	787	965
 <b>AASHTO H-20 Truck<sup>4</sup></b> 14 515 kg Axle Load Dual Wheels	9 435	508 + 51	508	406	584	736	863	1 041	508 + 60	508	381	558	685	838	990	508 + 76	508	355	533	660	787	939
 <b>AASHTO H-15 Truck<sup>4</sup></b> 10 886 kg Axle Load Dual Wheels	7 076	381 + 51	381	381	558	711	863	1 041	381 + 60	381	355	533	685	812	990	381 + 76	381	330	508	635	762	939
 <b>AASHTO H-10 Truck<sup>4</sup></b> 7 257 kg Axle Load	4 717	254 + 51	254	330	533	711	863	1 066	254 + 60	254	304	508	685	812	1 016	254 + 76	254	279	482	635	787	939
 <b>AASHTO H-5 Truck<sup>4</sup></b> 3 629 kg Axle Load	2 359	127 + 51	127	304	558	736	889	1 092	127 + 60	127	279	533	711	863	1 066	127 + 76	127	254	508	660	812	1 016
 <b>Passenger Vehicles<sup>5</sup></b> 2 868 kg Vehicle 1 623 kg Load 60% Drive Axle Load	1 751	229 + 51	229	431	660	863	1 066	1 295	229 + 60	229	406	635	838	1 016	1 244	229 + 76	229	381	609	787	965	1 168
 <b>5 Ton Capacity Forklift<sup>5</sup></b> 6 532 kg Vehicle 11 068 kg Total Load 85% Drive Axle Load	6 114	279 + 51	279	304	508	660	812	990	279 + 60	279	279	482	635	787	939	279 + 76	279	254	431	609	736	889
 <b>3 Ton Capacity Forklift<sup>5</sup></b> 4 445 kg Vehicle 7 168 kg Total Load 85% Drive Axle Load	3 960	178 + 51	178	279	508	685	838	1 016	178 + 60	178	254	482	635	787	965	178 + 76	178	228	406	609	736	914
 <b>1 Ton Capacity Forklift<sup>5</sup></b> 1 905 kg Vehicle 2 182 kg Total Load 85% Drive Axle Load	1 554	102 + 51	102	355	609	812	990	1 193	102 + 60	102	330	584	762	939	1 168	102 + 76	102	304	558	736	914	1 117

### NOTES:

- Load is carried by the grating load bars immediately under the wheel, plus two additional load bars, one on each side of the wheel.
- Allowable Span is based on a 6.4 mm maximum deflection and a Factor of Safety of 3.0. Other criteria may be required by certain construction codes. Check code requirements to determine design criteria.
- ALLOWABLE SPAN IS STRONGLY DEPENDENT ON WHEEL WIDTH AND VEHICLE WEIGHT/LOAD CAPACITY. If your application varies from the values given on this table, contact Fibergate Engineering for application assistance.
- Load based on the AASHTO Standard Truck Load as defined in AASHTO LRFD Bridge Design Specifications, 2nd Ed. This does not imply that the allowable span meets the deflection requirements of this specification.

- Long Span Walkways
- Ramps and Loading Docks
- Trench Covers
- Flooring/Platforms
- Storage Areas
- Assembly Lines




# High Load Capacity Grating Details

## Grating Details


HI37 Series 

### 25 mm Deep HI3710

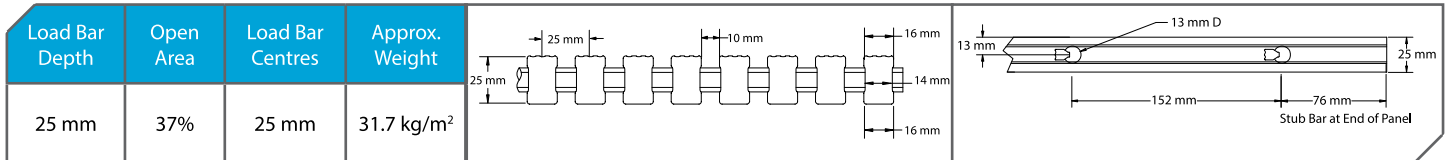


**Section Properties per Ft of Width:** A=14,977 mm<sup>2</sup>/m I=8.11x10<sup>5</sup> mm<sup>4</sup>/m S=1.62x10<sup>6</sup> mm<sup>3</sup>/m

### 38 mm Deep HI3715

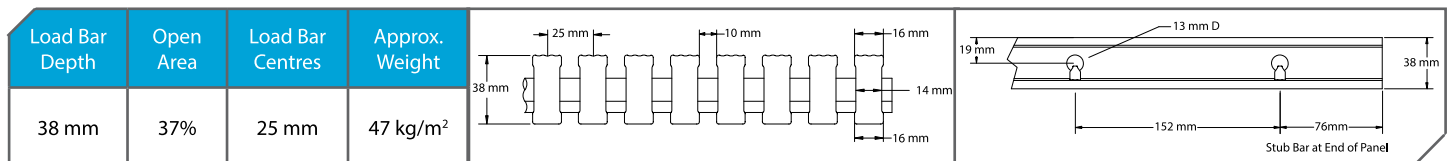


**Section Properties per Ft of Width:** A=22 088 mm<sup>2</sup>/m I=2.72x10<sup>6</sup> mm<sup>4</sup>/m S=3.63x10<sup>6</sup> mm<sup>3</sup>/m

### 51 mm Deep HI3720

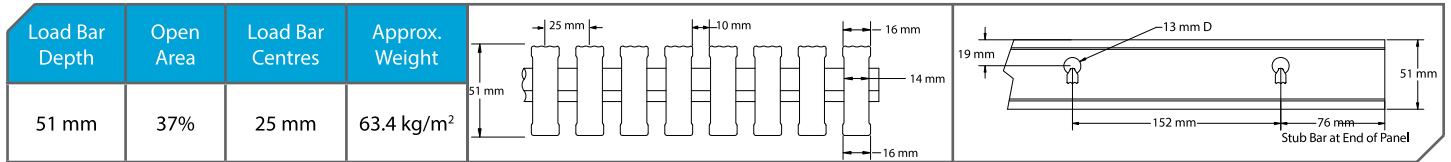


**Section Properties per Ft of Width:** A=29 250 mm<sup>2</sup>/m I=6.52x10<sup>6</sup> mm<sup>4</sup>/m S=6.52x10<sup>6</sup> mm<sup>3</sup>/m

### 64 mm Deep HI3725

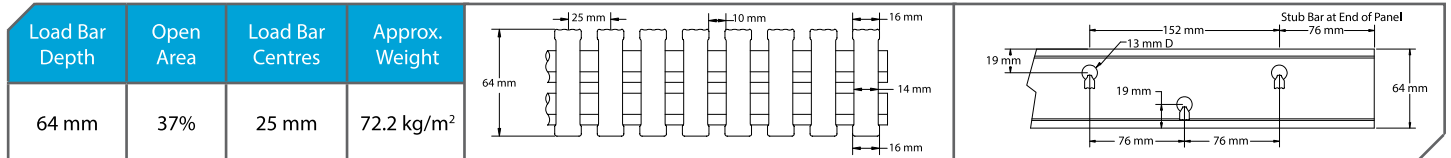

**Section Properties per Ft of Width:** A=36 437 mm<sup>2</sup>/m I=1.26x10<sup>7</sup> mm<sup>4</sup>/m S=1.01x10<sup>7</sup> mm<sup>3</sup>/m

### 76 mm Deep HI3730

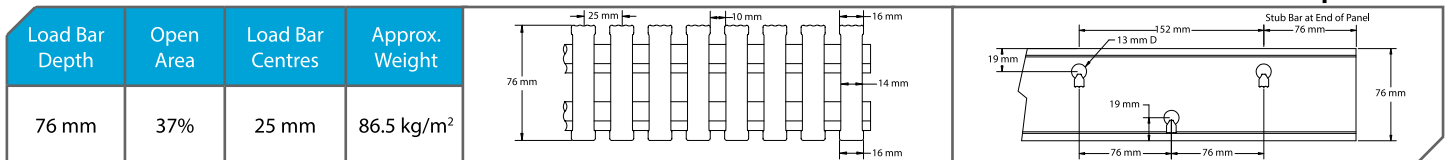

**Section Properties per Ft of Width:** A=43 574 mm<sup>2</sup>/m I=2.17x10<sup>7</sup> mm<sup>4</sup>/m S=1.45x10<sup>7</sup> mm<sup>3</sup>/m

**NOTES:**


1. All pultruded grating panels are assembled to size from stocked bar lengths of 6.1m and 7.3m to minimize waste and cost. The maximum panel widths (tie bar length) are 1.2m nominal.
2. Available panel sizes are dependent upon application requirements and individual panel weight considerations, as this is a very heavy product.

# High Load Capacity Grating Details

## Grating Details


### HI47 Series

#### 25 mm Deep HI4710

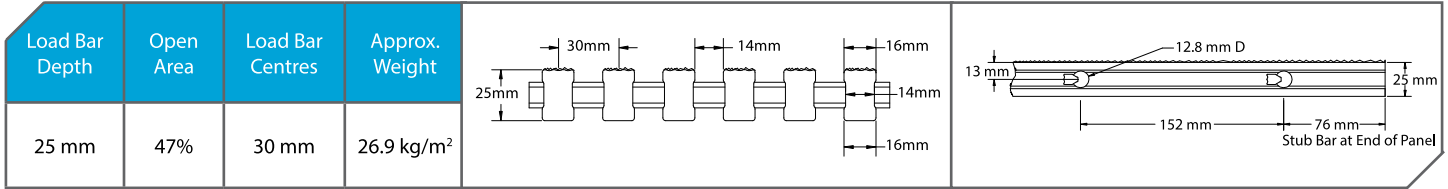


**Section Properties per m of Width:**  $A=1.3 \times 10^4 \text{ mm}^2$   $I=7.0 \times 10^5 \text{ mm}^4$   $S=5.4 \times 10^4 \text{ mm}^3$

#### 38 mm Deep HI4715

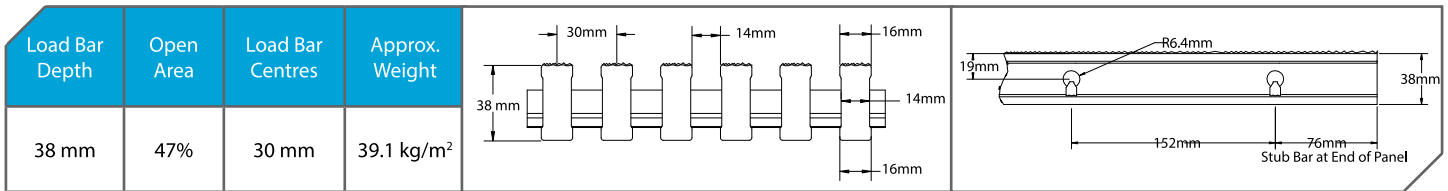


**Section Properties per m of Width:**  $A=1.9 \times 10^4 \text{ mm}^2$   $I=2.3 \times 10^6 \text{ mm}^4$   $S=1.2 \times 10^5 \text{ mm}^3$

#### 51 mm Deep HI4720

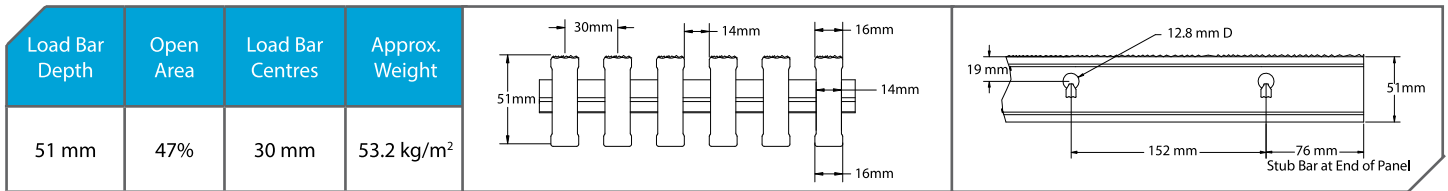


**Section Properties per m of Width:**  $A=2.5 \times 10^4 \text{ mm}^2$   $I=5.4 \times 10^6 \text{ mm}^4$   $S=2.1 \times 10^5 \text{ mm}^3$

#### 64 mm Deep HI4725

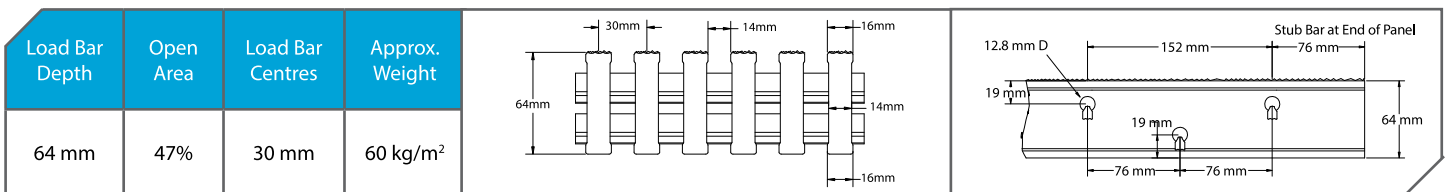

**Section Properties per m of Width:**  $A=3.07 \times 10^4 \text{ mm}^2$   $I=1.09 \times 10^7 \text{ mm}^4$   $S=3.31 \times 10^5 \text{ mm}^3$

#### 76 mm Deep HI4730

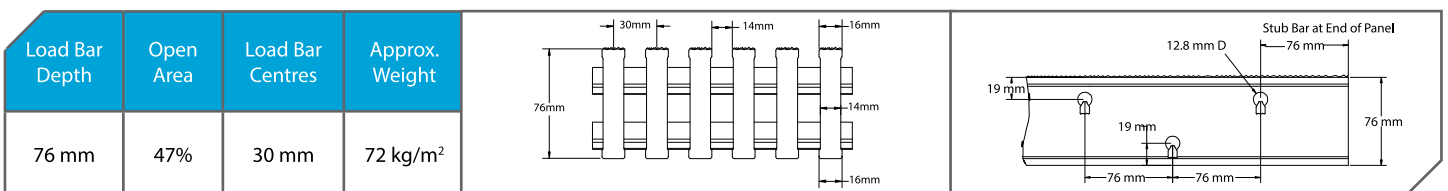

**Section Properties per m of Width:**  $A=3.67 \times 10^4 \text{ mm}^2$   $I=1.81 \times 10^7 \text{ mm}^4$   $S=4.74 \times 10^5 \text{ mm}^3$


- NOTES:**
- All pultruded grating panels are assembled to size from stocked bar lengths of 6.1m and 7.3m to minimize waste and cost. The maximum panel widths (tie bar length) are 1.2m nominal.
  - Available panel sizes are dependent upon application requirements and individual panel weight considerations because this is a very heavy product.

# High Load Capacity Grating Details

## Grating Details


### HI58 Series

#### 25 mm Deep HI5810

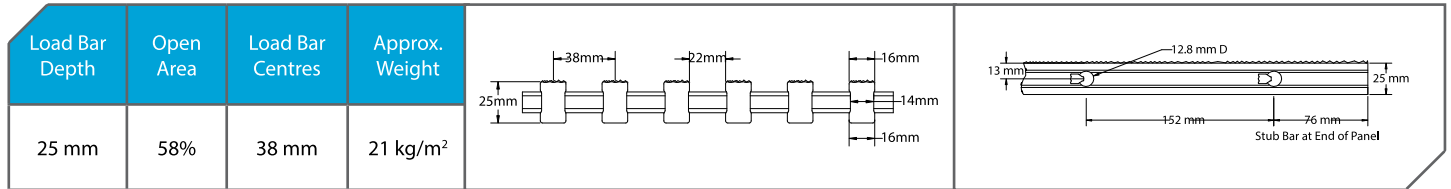


**Section Properties per m of Width:**  $A=9.99 \times 10^3 \text{ mm}^2$   $I=5.46 \times 10^5 \text{ mm}^4$   $S=4.19 \times 10^4 \text{ mm}^3$

#### 38 mm Deep HI5815

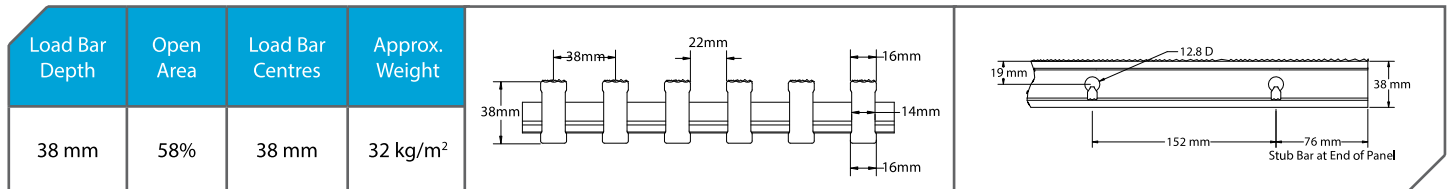


**Section Properties per m of Width:**  $A=1.47 \times 10^4 \text{ mm}^2$   $I=1.86 \times 10^6 \text{ mm}^4$   $S=9.62 \times 10^4 \text{ mm}^3$

#### 51 mm Deep HI5820

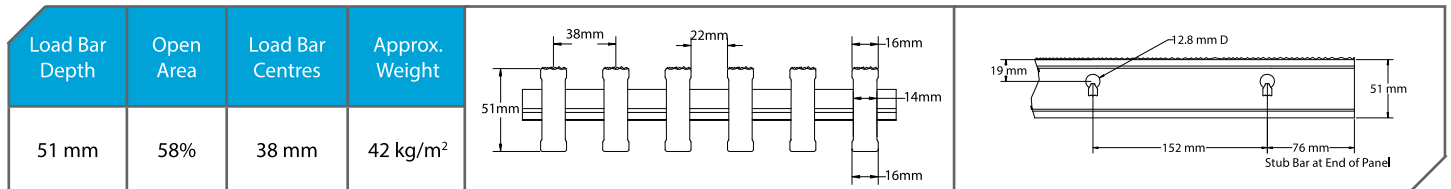


**Section Properties per m of Width:**  $A=1.95 \times 10^4 \text{ mm}^2$   $I=4.26 \times 10^6 \text{ mm}^4$   $S=1.68 \times 10^5 \text{ mm}^3$

#### 64 mm Deep HI5825

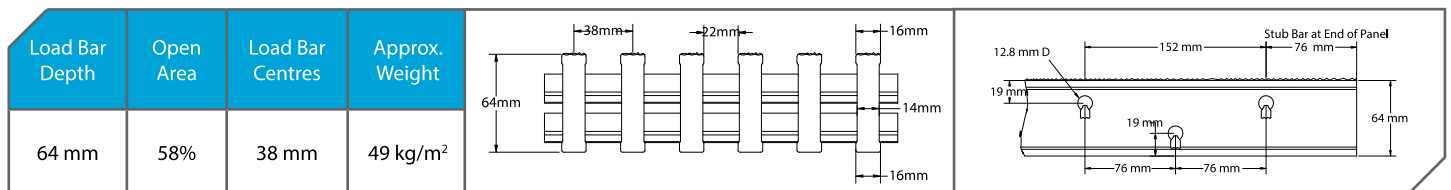

**Section Properties per m of Width:**  $A=1.95 \times 10^4 \text{ mm}^2$   $I=8.32 \times 10^6 \text{ mm}^4$   $S=2.62 \times 10^5 \text{ mm}^3$

#### 76 mm Deep HI5830

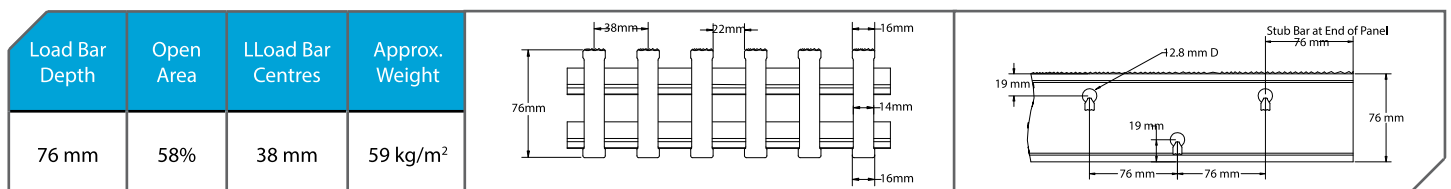

**Section Properties per m of Width:**  $A=2.91 \times 10^4 \text{ mm}^2$   $I=1.43 \times 10^7 \text{ mm}^4$   $S=3.75 \times 10^5 \text{ mm}^3$

#### NOTES:

- All pultruded grating panels are assembled to size from stocked bar lengths of 6.1m and 7.3m to minimize waste and cost. The maximum panel widths (tie bar length) are 1.2m nominal.
- Available panel sizes are dependent upon application requirements and individual panel weight considerations because this is a very heavy product.